


**PARKER ADVANTAGE SHEET**  
**PARKER U-DRUM WATER TUBE STEAM BOILERS**  
**9.5 TO 22 H.P. POWER GAS, OIL OR GAS/OIL FIRED**

1. **RELIABILITY**: The superior design and quality construction of the Parker Boiler assures the best available in reliable, trouble-free and long life service. Parker has manufactured dependable boiler products for over 75 years.
2. **SAFETY**: The heavy construction and all welded bent tube flexible design of the Parker provides the ultimate in safety available in a steam boiler.
3. **FAST HEAT-UP**: The boiler requires less than seven minutes to heat up to 100 PSI steam pressure from a cold start. This is a considerable time and fuel saver.
4. **SIMPLICITY**: The control system and entire boiler are furnished so that it is simple to operate by regular personnel and easy to repair without requiring special tools or skills.
5. **LOW COST OPERATION**: The staggered tubing design provides an 8-pass self-baffled heating surface with uniform heat distribution to permit maximum heat transfer resulting in lower stack temperatures and more economical operation.
6. **SECTIONAL TUBES**: Parker tubes are 1-5/16" O.D. Grade SA-53 steel heavy .133" thickness which is almost double that of standard gauge boiler tubing. Each tube is double welded to headers with high tensile weld metal by the inert gas process to assure full penetration and greater strength. Tubes are furnished in two individual sections, each attached by two union connections for easy replacement. The bent tube design permits free expansion of each tube individually eliminating strain, warping, and leaking, typical of rigid design.
7. **EASILY CLEANED**: The flexible design permits complete blowdowns from high pressure so that the drum, tubes and mud traps can be thoroughly flushed clean each day. Accessible inspection openings are provided in the drum, mud leg and on the headers at end of each tube for easy inspection. If necessary, internal cleaning can be accomplished effectively and economically with chemicals.
8. **HEAVY INSULATED CABINET - INTERNAL ACCESSIBILITY**: The sectional cabinet consists of two thicknesses of heavy 16-gauge steel, well insulated with 1-1/2" thick high temperature thermal fiber insulation. This reduces radiation loss to a minimum and protects against fire hazards. Cabinets are finished with an attractive baked enamel, heat resistant finish for long life protection. The inspection doors at the front and rear of the cabinet can be easily removed in minutes for complete accessibility to the internal boiler and burner.
9. **CONTROLS**: All Parker Boilers are standardly furnished with first line quality automatic controls to assure safe and fully automatic operation. Each boiler has an enclosed boiler control panel, pressure atomizing power burner, electronic flame safeguard with manual reset, operating pressure control and separate manual reset high limit, dual fuel shutoff valves, primary low water cutoff and pump control with motor starting relay and separate secondary low water cutoff.
10. **COMPACT - EASY TO INSTALL**: Parker Boilers are furnished fully assembled with electrical controls mounted and wired to the boiler control panel. Each unit is factory fire tested to meet the highest standards in all phases of mechanical and operating efficiencies before shipment. Installation costs are held to a minimum since the boiler is furnished completely packaged with all trim and requires a minimum amount of valuable floor space.
11. **CODES**:

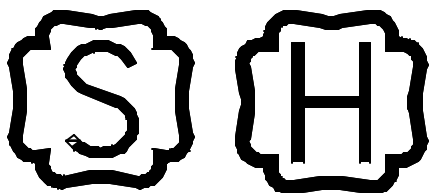

NATIONAL  
BOARD

All Boilers are built in accordance with the A.S.M.E. Power & Heating Boiler Codes, Sections I & IV. Boilers above 15 PSI are furnished with the "S" Stamp and Trim. Boilers for 15 PSI are normally furnished with the "H" Stamp and Trim. All Boilers are inspected and registered with the National Board of Boiler and Pressure Vessel Inspectors.

All individual gas and electrical controls are AGA Certified or UL Listed. Power Gas, Oil and Combination Gas/Oil Fired Boilers are furnished with a UL Listed Burner.